

REQUIREMENTS FOR NEW HANDRAILS


DRAWINGS MUST INDICATE:

1. HEIGHT FROM GRADE TO LANDING
2. HEIGHT OF HANDRAIL AND GUARDRAIL
3. SPACING BETWEEN BALUSTER
4. LOCATION OF STAIR WHERE NEW HANDRAIL IS INSTALLED (FRONT, REAR, SIDE YARD)
5. HANDGRIPS MUST BE INSTALLED ON ONE SIDE OF HANDRAIL
6. PLEASE REVIEW OFFICE HANDOUT FOR DETAILS
7. ENDS SHALL BE RETURNED TO WALL OR POST


SAL GIAMBRI
BUILDING SUBCODE OFFICIAL

Graspable handrail detail

Exposed exterior wood, ground or concrete contacting wood must be pressure treated or equal.

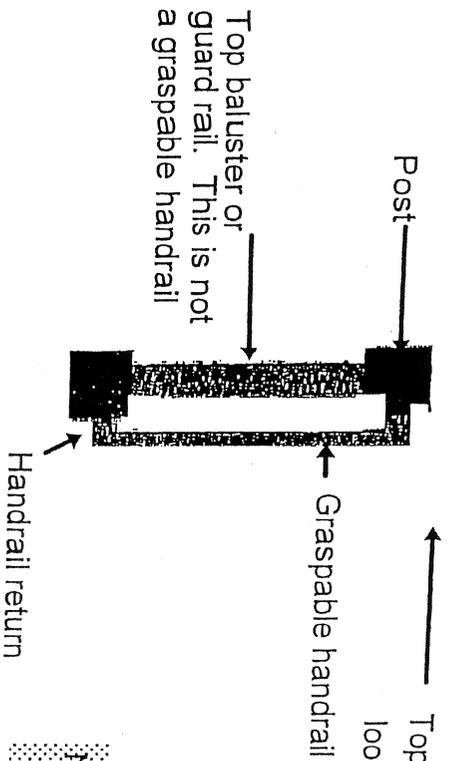


NOTE: Stairs depicted are example for grab rail. Baluster detail can be found on attached pages.

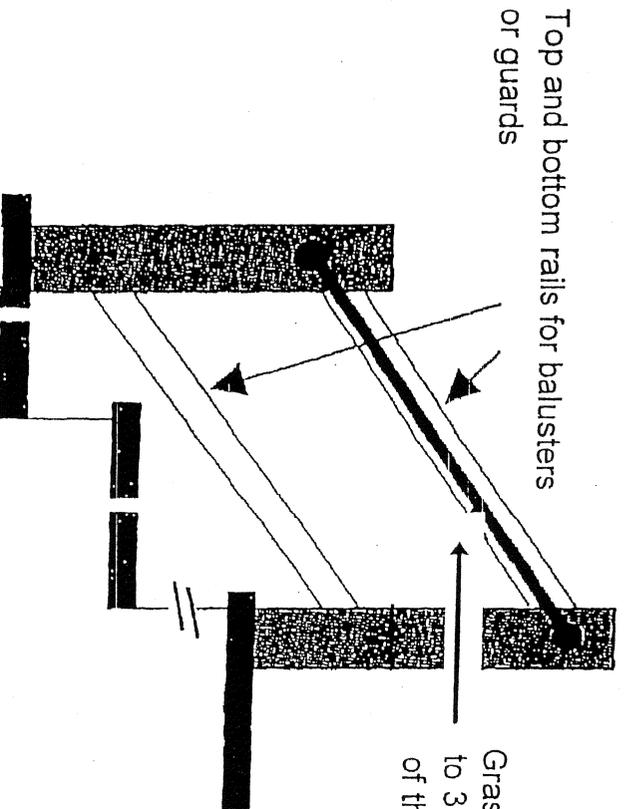


Graspable handrail detail

2 5/8" max width of railing

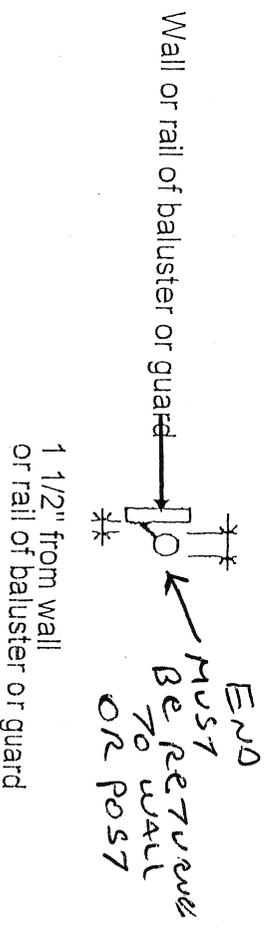

TYPICAL STAIR AND BALUSTER OR GUARD DETAIL

Exposed exterior wood, ground or concrete contacting wood must be pressure treated or equal.

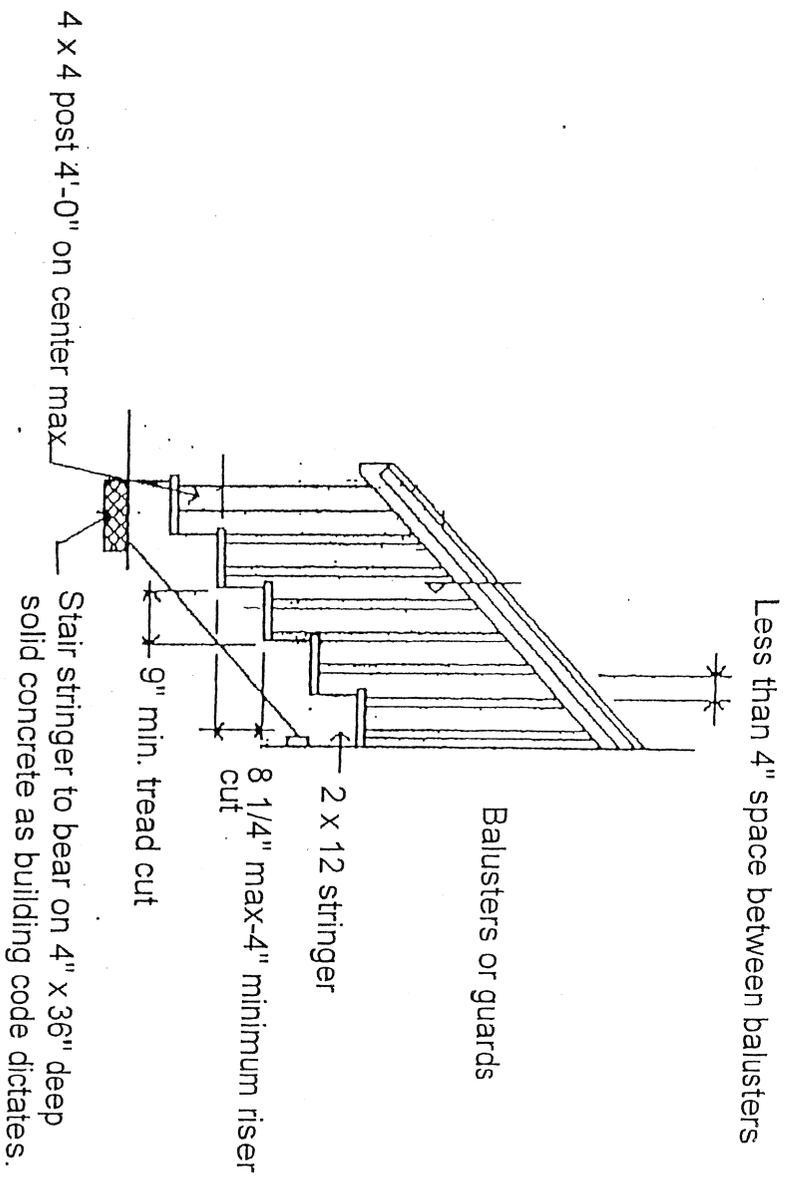

number of risers may vary with grade